

Part Number: IP7-MZC-FD

IP Innovation

Multi-Zone Controller

Flexible & expandable full-duplex IP audio endpoint designed for Central Station applications



Description:

Digital Acoustics Multi-Zone Controller (**IP7-MZC-FD**) is an industry-leading IP endpoint developed to converge multiple analog zones using a single IP connection. Central stations can manage 2-way audio in multiple locations over just one VoIP connection.

This next-generation device eliminates costly telephone land-lines and opens the door to future developments and advancements in VoIP telephony and remote security applications.

Features:


- Expandable from 1 to 48 zones* via single SIP or TalkMaster FOCUS IP connection
- Supports Paging, Listening, and Full Duplex two-way communications
- Individual mic gain & speaker volume control
- Emergency Handset “Red Phone”
- DVR Monitor line outputs
- On-board & remote diagnostics
- Ideal for wide-area deployments

The IP Multi-Zone Controller is mission critical and operator friendly. The IP7-MZC-FD is designed for:

- Remote Monitoring & Security
- Parking & Multiple Tenant Structures
- Industrial & Commercial Buildings
- Targeted Audience Announcements

Hardware Specifications:

Network Protocols TCP, UDP, RTP, SIP, ICMP, IGMP Multicast
Network Interface 10/100 Base-T Ethernet, Auto-MDIX
Core Technology ICC-512 50 MIPS SoC (System On A Chip)
IP Address Assignment Static, DHCP
Transport Bandwidth Nominal 64kbps
Audio Protocol 8-bit PCM/G.711 uLaw
Audio Latency <200ms
Diagnostics LED Status, USB, Temperature and Power Monitoring
Power 12VDC @ 15W
Remote Programming Flash programmable via Ethernet
Fault Management Patented Fail-Forward™ fault detection
Connector I/O 5mm pluggable connector
Network Connector RJ45 (2)
Temperature -30~70 C (Operating), -40 C~85 C (Storage)

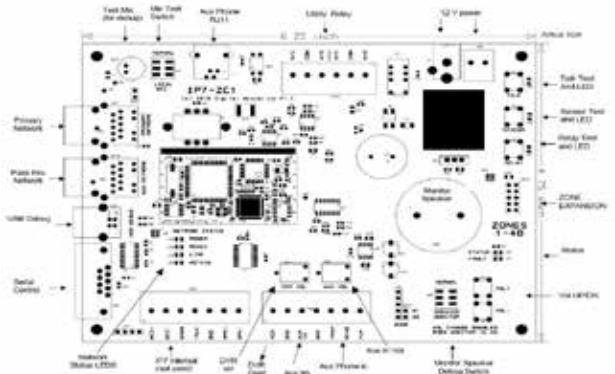


Documentation:

visit www.digitalacoustics.com/support

Related Products & Accessories:

- IP7-ZX4L - Four-zone expansion board, line out
- IP7-ZX2L20W - Four-zone expansion board, 2-line level, 2 amplified (20 watts)

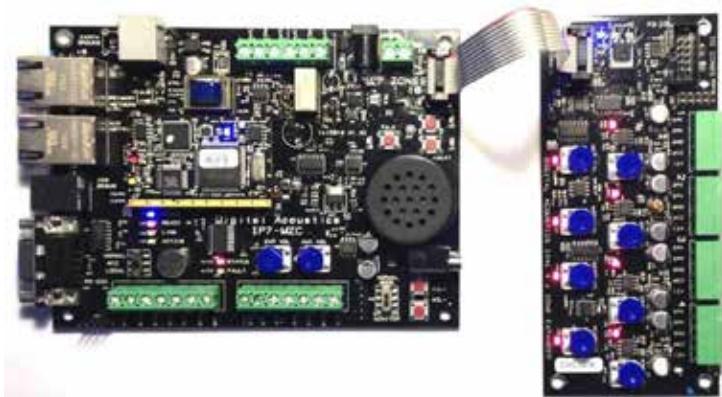

* Expansion of zones requires use of IP7-ZX4L

Visit www.DigitalAcoustics.com to learn about software products to complete your IP audio system.



Digital Acoustics' product designs are packaged by leading manufacturers around the world. Contact factory for technical specification before product design and/or use. Design and specification are subject to change without notice. Not responsible for typographical errors. TalkMaster, IP7, ICC, Fail-Forward, and iTalk/X are trademarks of Digital Acoustics. I2C is a registered trademark of NXP Semiconductors, Inc. All other trademarks are the property of their respective owners. ©2015 IP7-MZC-FD V1